


# HR5 Unistrut Roller

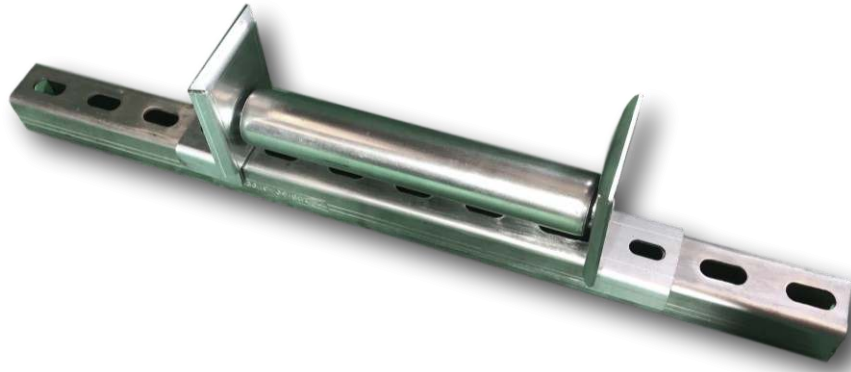

The HR5 unistrut roller can be bolted directly down onto 42mm unistrut (as illustrated), flat plate or square box section up to 40mm. The roller can be made to any width but as standard comes with a 240mm wide roller (340mm overall)

- All steel construction with tapered edges for smooth guiding
- Slotted holes for flexible fixing
- 40mm diameter x 240mm long gravity roller\*
- Sealed precision roller bearings fitted
- Zinc plated finish
- Size: 34cm long x 8cm wide x 10cm high (above unistrut 12cm overall)
- Weight: 1Kg

\* Any length can be fitted as a special order

TWS are proactive in product development and enhancement and as such the specifications are subject to alteration without prior notice

Trailer & Winch Solutions Ltd, Unit 5, Welsh Croft Close, Kirkby in Ashfield, NG17 8EP  
Tel: 01623 752088 – Fax: 01623 880172 – Mob: 07729 967395 – Email: sales@twsltd.co.uk